

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)



The
Patent
Office

PCT/GB00/00168

09 12 89 537

INVESTOR IN PEOPLE
e. - 22-02
The Patent Office
Concept House
Cardiff Road
Newport
South Wales

GB 99/168


NP10 8QQ	
REC'D	14 FEB 2000
WIPO	PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

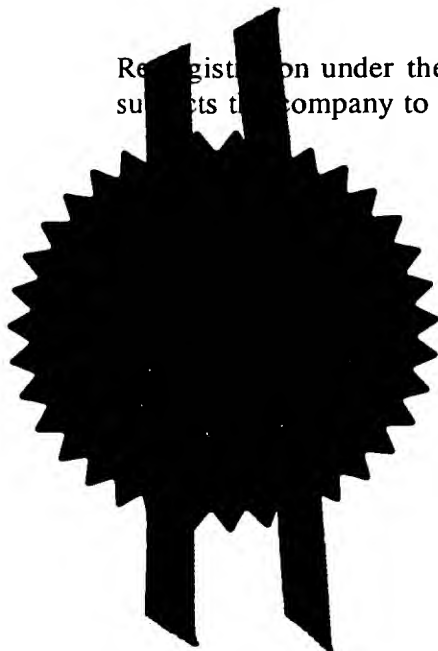

Signed

[Signature]

Dated 28 JAN 2000

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

THIS PAGE BLANK (USPTO)

THE PATENT OFFICE
J
22 JAN 1999
RECEIVED BY POST

Cardiff Road
Newport
Gwent NP9 1RH

(See the notes on the back of this form. You can also obtain an explanatory leaflet from the Patent Office to help you fill in this form)

- | | | | | |
|----|---|--|--|---------------------------------|
| 1. | Your reference | NMM/RJB/P66650GB | | |
| 2. | Patent application number
(The Patent Office will fill in this part) | 9901304.7 | | 22 JAN 1999 |
| 3. | Full name, address and postcode of the or of each applicant (underline all surnames) | The University of Liverpool,
Senate House,
Abercromby Square,
Liverpool,
L69 3BX | | |
| | Patents ADP number (if you know it) | | | |
| | If the applicant is a corporate body, give the country/state of its incorporation | ENGLAND. 891184004 | | |
| 4. | Title of the invention APPARATUS AND METHOD FOR DETERMINING DIELECTRIC PROPERTIES OF AN ELECTRICALLY CONDUCTIVE FLUID. | | | |
| 5. | Name of your agent (if you have one) | W.P.THOMPSON & CO. | | |
| | "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) | Coopers Building,
Church Street,
Liverpool,
L1 3AB. | | |
| | Patents ADP number (if you know it) | 0000158001 ✓ | | |
| 6. | If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number | Country | Priority application number (if you know it) | Date of filing (Day/month/year) |
| 7. | If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application | Number of earlier application | | Date of filing (Day/month/year) |
| 8. | Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'yes' if: | | | |
| | YES | | | |
| | a) any applicant named in part 3 is not an inventor, or | | | |
| | b) there is an inventor who is not named as an applicant, or | | | |
| | c) any named applicant is a corporate body. | | | |

See note (d))
Patents Form 1/77

9. Enter then number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 19

Claims(s)

Abstract

Drawing(s) 11

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (Please specify)

11.

I/We request the grant of a patent on the basis of this application

Signature

W.P. Thompson & Co.
W.P. THOMPSON & CO.

Date 21/01/99

12.

Name and daytime telephone number of person to contact in the United Kingdom

R.J. BARTLE
0151-709-3961

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTIONAPPARATUS AND METHOD FOR DETERMINING DIELECTRIC
PROPERTIES OF AN ELECTRICALLY CONDUCTIVE FLUID.

The present invention is concerned, in its broadest aspect, with an apparatus for and method of determining dielectric properties of an electrically conductive fluid. The invention is applicable in particular to the monitoring of multi-phase flows such as are found in oil pipelines.

The flow of material from an oil well typically contains not only crude oil but also other constituents, gas and water generally being the most significant of these. Other constituents such as sediment and algae are typically present in relatively small quantities. It is often necessary to monitor the relative proportions of the major constituents of the flow. One reason for this is to judge when a given well is becoming exhausted, signalled by a decline in the proportion of oil.

The traditional technique for this monitoring has involved separation of a sample of the material into its constituents, allowing straightforward single phase monitoring techniques to be used. While effective, processing systems based on this technique are somewhat inflexible in terms of their capability to handle fluctuating flow rates, varying water content and changes in the physical properties of the constituent fluids.

The technique also involves an undesirable time lag between extraction of the material at the well head and assessment of its constituents, not least because the assessment has to be made after separation of the materials on the rig itself - ie. a considerable distance downstream of the well head.

For these reasons numerous projects have been undertaken to develop systems capable of real time multi-phase metering (MPM) - ie. real time measurement of the constituents of a sample (more specifically a flow) containing two or more constituents. The aim of such projects has been to arrive at a system capable of monitoring the proportions of oil, gas and water in an extraction pipeline. Such systems are now commercially available, but are not yet wholly satisfactory.

Such systems operate by monitoring bulk properties of the flow (without separating it into its constituent parts) and inferring from these the proportions of the major constituents of the flow - in the practical case of oil extraction, the major constituents are oil, gas and water.

To enable such inferences to be made, more than one property of the flow is monitored. Known systems typically measure the density of the flow material, its effect in attenuating gamma rays, and one other flow property such as its capacitance.

In tests, most existing systems prove to be capable of accurately measuring two phases - fluid and gas - but fail to achieve the desired accuracy in

relation to flows having high water or low gas content when measuring three phase flows - oil, gas and water.

It is one of the objects of the present invention to make possible improved monitoring of three phase flows.

It is considered that in order to improve the accuracy of MPM devices it is important to monitor a third bulk property of the flow (aside from density and gamma ray attenuation) and that as yet no appropriate technique has been proposed for accurately monitoring an appropriate property.

The reason for the need for a third property measurement may be simply stated. It is necessary in a three phase flow to establish three unknown quantities - the proportions of the three constituents (eg. oil, gas and water). To this end, three simultaneous equations, one contributed by each monitored property, are required.

There has been at least one project which attempted to monitor, as the necessary third property, the effect of the flow on the propagation of electromagnetic radiation through it. This project faced an important problem. Flows emerging from an oil well head are electrically conductive due, among other factors, to their inclusion of salt water. Conventional technical teaching, based on the application of Maxwell's equations, is that electromagnetic radiation of wavelengths cannot be efficiently propagated through a conductive medium

The solution adopted by the previous project was to use high power

electromagnetic radiation. To provide this power it was necessary to use a magnetron, which operated at a power of the order of 1 Kilowatt. and at a frequency of 2.46 GHz. Due to the use of a magnetron to supply this radiation, its frequency was non-adjustable. The radiation was input to a resonant cavity, through which the flow was passed. The cavity walls were conductive and were exposed to the flow itself. Due to the resonance requirement, the dimensions of the cavity were largely fixed as a function of the (fixed) frequency used.

Coupling of the microwave radiation into the cavity was achieved by an aerial, necessarily very large, which was itself exposed to the contents of the cavity ie. to the flow.

The device unfortunately proved unsatisfactory due to factors including the size and expense of the magnetron used and its fixed frequency.

Despite these problems, it is recognised that measurement of the properties of the flow with regard to electromagnetic radiation is desirable since the properties of the three major constituents of the flow with regard to EM radiation are widely divergent, and hence easy to distinguish. This can be appreciated from the fact that the relative permittivity of the three constituents is approximately as follows:

- i. gas, $\epsilon_r = 1$;
- ii. crude oil, $\epsilon_r = 2.2$ (and this proves to be largely constant for all crude oils, despite variations in its component fractions);
- iii. water, $\epsilon_r = 81$.

The inventors have realised, and confirmed by experiment, that contrary to the hitherto conventional teaching, it is possible to efficiently couple radio and microwave radiation into a conductive medium within a resonant cavity provided that the cavity walls and the antenna used to output the radiation are electrically isolated from the medium itself.

In accordance with a first aspect of the present invention, there is an apparatus for determining dielectric properties of an electrically conductive fluid, comprising an electromagnetically resonant cavity defined by an electrically conductive boundary; inlet means through which the fluid can be introduced into the cavity; an insulating layer whereby the cavity boundary is electrically isolated from fluid material within the cavity; an emitter antenna and associated drive electronics for emitting electromagnetic radiation to the cavity, the emitter antenna being electrically isolated from fluid material within the cavity; and means for detecting resultant electromagnetic radiation within the cavity.

Experiments carried out by the inventors have confirmed that using such an arrangement measurements of dielectric properties can be made without the need for the high power provided by a magnetron. In prototype arrangements, a simple loop aerial driven by an electronic oscillator has proved adequate by virtue of the efficient propagation of radiation through the fluid material made possible by the arrangement. As compared with the previous magnetron apparatus, this makes possible great simplification and cost saving, as well as other benefits which will become clear below.

The fluid in question may contain some solids, as typically does a flow of material in an oil extraction pipeline.

With regard to the frequency of radiation emitted into the cavity, it is considered that the present invention is particularly applicable to radio and microwave frequencies. The frequency range used is in part determined by the resonance requirement and hence the cavity dimensions. It is currently believed potentially worthwhile to measure the response to frequencies of the order of 10 MHz to 10GHz. Research to date has usefully concentrated on the narrower range from approximately 100MHz to approximately 5GHz.

It is particularly preferred that the drive electronics are adapted to operate at a range of frequencies such that a range of frequencies of electromagnetic radiation can be emitted to the cavity. Preferably, the frequency is continuously variable.

This can be conveniently achieved in apparatus according to the present invention since the radiation does not need to be at the high power provided by the magnetron of the previous system.

In prototype arrangements embodying the present invention, a laboratory spectrum analyser has been used to drive a loop aerial at a continuously variable frequency. In this way, it becomes possible to measure the properties of the cavity and the material it contains throughout a chosen region of the electromagnetic spectrum.

The antenna for emitting electromagnetic radiation into the fluid material is preferably disposed within the resonant cavity such as to project

into the fluid material, the antenna being provided with an insulating layer by which it is electrically isolated from the fluid material.

Such an arrangement provides for efficient coupling of the electromagnetic radiation into the fluid material.

The conductive boundary of the resonant cavity may comprise a conductive wall whose inner surface is covered by an internal insulating layer by which the wall is electrically isolated from the fluid material within the cavity. The insulating layer may be a low loss dielectric. Ceramic can be used.

It is particularly preferred that the resonant cavity has an inlet and an outlet such that the fluid material can flow through the cavity. This makes it possible to monitor, continuously if required, the properties of a fluid flow.

In a currently preferred embodiment of the present invention, the means for detecting electromagnetic radiation within the cavity comprise a receiver antenna disposed within the resonant cavity and electrically isolated from the fluid material within the cavity.

Alternatively or additionally, the means for detecting electromagnetic radiation within the cavity may comprise electronics connected to the emitter antenna for measuring the voltage standing wave ratio. The effect is to provide an indication of the reflected power at the emitter antenna.

In accordance with a second aspect of the present invention, there is provided a device for monitoring the constituents of a fluid flow, the device comprising an apparatus according to the first embodiment of the present

invention. Of particular importance is the case where the device is adapted for monitoring the constituents of a flow of material in an oil extraction pipeline.

In such an embodiment, the resonant cavity may be formed by a portion of the pipeline. Preferably, the electrically conductive boundary defining the resonant cavity comprises a conductive circumferential wall around the inside or outside of the pipeline. The boundary may additionally comprise conductive end walls disposed across the pipeline to functionally enclose the resonant cavity. It is not considered essential that these end walls be continuous - they may for example be formed by open wire grid or mesh, serving to form a functionally enclosed resonant electrical cavity while permitting flow of material through the pipeline. Alternatively, the cavity may be open ended. It is found that certain resonant modes persist even when the cavity is not enclosed.

The device may for example be installed in a pipeline close to the point of extraction, serving to monitor in real time the properties of the material being extracted.

It is particularly preferred that the device comprises measurement electronics for determining the frequency of a resonance peak corresponding to a selected resonant mode within the cavity.

As will be explained below, it has been found that the frequency of such a resonance peak is shifted according to the proportions of different materials in the fluid flow, and that the frequency provides information which can be used in determining, or at least estimating, the proportions of different

materials in the flow.

The device preferably comprises means for measuring additional properties of the fluid flow and calculating means for determining, on the basis of the measured properties, the proportions of certain constituents of the flow. The additional properties measured may comprise absorption of gamma ray radiation and density.

In a preferred embodiment, the calculating means operates by calculating for a set of possible permutations of flow constituents the expected values of the measured properties and comparing these with the actual measured values to determine which permutation best matches the measured properties.

The calculating means may comprise a neural network, trained on experimental data, for determining expected quantities relating to the dielectric properties of the flow corresponding to the permutations of flow constituents. The quantities in question may be the frequencies of a selected resonant mode of the cavity.

In accordance with a third aspect of the present invention, there is a method of determining dielectric properties of an electrically conductive fluid comprising the steps of disposing the fluid material in or passing the fluid through an electromagnetically resonant cavity defined by an electrically conductive boundary which is electrically isolated from the fluid by an insulating layer, emitting electromagnetic radiation into the resonant cavity by means of an antenna which is electrically isolated from the fluid and detecting

and analysing the resultant electromagnetic radiation within the resonant cavity.

Preferably, the method comprises varying the frequency of the emitted electromagnetic radiation and obtaining an indication of the amplitude of the resultant electromagnetic radiation within the resonant cavity. The frequency variation may be continuous. The results are preferably analysed to determine the position of at least one resonance peak within the cavity.

Detection of electromagnetic radiation within the resonant cavity may, in a preferred embodiment of the method according to the present invention, be by means of a receiver antenna itself electrically isolated from the fluid material. Alternatively or additionally it may be by analysis of the voltage standing wave ratio in the emitter antenna.

In a particularly preferred version of the method according to the present invention, the determined dielectric properties are utilised to monitor the constituents of a fluid flow passed through the resonant cavity.

Preferably such a method comprises additionally monitoring further properties of the fluid flow. Gamma ray radiation absorption and density are suitable properties.

The method preferably comprises calculating for a set of possible proportions of flow constituents the expected values of the measured properties and comparing these with the measured values to determine which best matches the measured properties.

Specific embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in

which:-

Figure 1 is a longitudinal section through a prototype resonant cavity apparatus embodying the present invention;

Figure 2 is a graph showing the amplitude (measured in millivolts) of a signal detected by an aerial within the cavity against the frequency (measured in megahertz) of a microwave signal input to the cavity, in the case where the cavity is filled with gas;

Figure 3 corresponds to Figure 2 but represents the case where the cavity is filled with oil;

Figure 4 corresponds to Figure 2 but represents the case where the cavity is filled with water;

Figure 5 is a graph having the same axes as Figure 2 (albeit with different ranges) on which signal amplitudes corresponding to cavities filled with gas, oil and water are juxtaposed;

Figure 6 is a table of observed fundamental resonance frequencies of the cavity corresponding to a range of cavity contents;

Figures 7 to 10 are graphs of the data set out in Figure 6;

Figure 11 is a graph showing four plots of detected signal amplitude variation with frequency for a mixture of water and air whose relative volumetric proportions were fixed throughout, each plot corresponding to a different rate of flow of the mixture through the apparatus;

Figure 12 is a graph showing how the detected signal is altered by an admixture of sand within the cavity;

Figure 13 illustrates elements of a neural network for use in an embodiment of the present invention;

Figure 14 shows the inputs to, and outputs from, the neural network during its training;

Figure 15 is a block diagram of a system utilising the neural network to infer the proportions of the constituents of a flow through the microwave cavity;

Figure 16 is a longitudinal section through a resonant cavity apparatus embodying the present invention for use in an oil pipeline; and

Figure 17 is a graph of voltage standing wave ratio at the transmitter antenna of an apparatus embodying the present invention for cavities filled with oil, gas and water.

The prototype apparatus illustrated in Fig. 1 has been used for proving the feasibility of the present invention. The apparatus comprises a cylindrical microwave cavity defined by copper side and end walls, 2, 4 and having an axial inlet 6 and outlet 8 by means of which flow material can be passed through the cavity. The cavity had, in this prototype device, a length of 158mm and a diameter of 189mm. There is however scope for variation of the shape and dimensions of the cavity. In the experimental arrangement illustrated, a pump (not seen) is used to circulate the test medium and so provide a flow.

Within the cavity is a first loop aerial 10 serving as a microwave transmitter and a second loop aerial 12 serving as a microwave receiver.

An important feature of the apparatus is an electrical insulation layer 14 provided on the interior of the cavity walls to electrically isolate the cavity walls from the cavity's interior. Further insulation layers 16, 18 are provided on the transmitter aerial 10 and the receiver aerial 12, which are thereby also electrically isolated from the interior of the cavity.

Experiments carried out using the prototype apparatus have confirmed that by virtue of the electrical isolation of the cavity and aerials from the cavity contents, it becomes possible to efficiently couple electromagnetic radiation into the medium and to detect the radiation, even where the power of the emitted radiation is low. In the prototype apparatus, both aerials are connected to a spectrum analyzer used both to drive the transmitter aerial 10 at a range of test frequencies and to detect and store the corresponding signal amplitudes detected by the receiver aerial 12. In this way, it is possible to measure and plot the full microwave spectrum of the cavity.

Figs. 2, 3 and 4 are the observed spectra for cavities filled with gas, oil and water respectively (established during preliminary testing of the apparatus) and show clear peaks corresponding to resonant modes of oscillation of the microwaves within the cavity.

The microwave cavity has been theoretically modelled using solutions to Maxwell's equations to clearly identify the modes of the resonances set up in the cavity. Each mode is either TE_{mnl} or TM_{mnl} where m represents the circumferential variations in the field pattern, n represents the radial variations of the field pattern and l represents the length variations of the field pattern.

Some of the identified modes obtained by matching up the theory to the experimental measurements are marked on Fig. 2.

There is preferential excitation of the TE modes under the illustrated experimental arrangement.

Comparing the spectrum for an oil filled cavity (Fig. 3) with that of a gas filled cavity (Fig. 2) it is found that there is an observable shift in the resonance peaks of approximately 400MHz, the resonant frequencies being lower when oil is present. This is due to the higher dielectric constant of oil (2.2) compared with gas (1.0).

When the cavity is filled with water, an extreme shift of resonant frequencies occurs due to the high dielectric constant of water (approximately 80).

The effect of the cavity contents on the positions of the resonance peaks is illustrated most clearly in Fig. 5, on which the three curves are superimposed, the left-most curve corresponding to a water filled cavity, the centre curve corresponding to an oil filled cavity and the right-most curve corresponding to a gas filled cavity. On each curve, the label R denotes the cavity's fundamental resonant mode. Its frequency shift is clearly apparent.

Figs. 2 to 5 concern the simple cases in which only one material is present within the cavity. The inventors have however studied the more complicated case of a mixed flow, and in particular measured the effect of a range of mixed flows on the frequency of the fundamental (lowest frequency) resonant mode within the cavity.

In Fig. 6, the experimentally observed frequency of the fundamental mode is tabulated against a range of proportions of gas, water and oil. The trends are more easily appreciated with reference to Figs. 7 to 10, which show:

Fig. 7: the variation of the frequency of the fundamental mode for an oil/gas combination;

Fig. 8: the variation of the frequency of the fundamental mode for a water/gas combination;

Fig. 9: the variation of the frequency of the fundamental mode for a water/oil combination; and

Fig. 10: the variation of the frequency of the fundamental mode for gas with a 50:50 admixture of oil and water.

The graphs are monotonic and give only a single frequency for a given mixture, under consistent conditions.

The pattern of flow within the cavity is dependent not only on the composition of the flow but also on other factors including its speed. In particular, the number and size of gas bubbles may be affected. The pattern of gas bubbles in an oil pipeline can also, for example, be affected by an expanding gas fraction at the well head, tending to generate enlarged gas "slugs".

It was anticipated that varying bubble sizes resulting from varying flow rates and other factors would cause a corresponding variation in the form of the observed microwave spectrum, but it has emerged from experiments

carried out by the inventors that the spectrum depends mainly on the volumetric composition of the flow and not on the gas bubble size or speed of flow. This is clearly advantageous given the goal of assessment of the constituents of a flow whose speed and flow pattern may vary.

The relevant observations are graphed in Fig. 11, on which are shown four spectra corresponding to four different rates of flow of a water/gas mixture (the volumetric proportions of which were fixed at 80% water and 20% air) through the prototype apparatus, including the base of zero flow - ie. a static mixture. Even when the flow is stopped, so that the gas forms a single body above the liquid, it is found that the spectrum is largely unchanged.

To assess the possible effect of further constituents in the flow (in addition to oil, gas and water) experiments have been carried out in which a proportion of sand is added. The results are graphed in Fig 12, where curve A was obtained when the cavity contained only water while curve B was obtained using 95% water with 5% sand. The dielectric constant of sand is approximately 4.5, and the sand therefore caused a detectable shift in the first resonance peak.

The overall effect of the above experiments is to confirm that the microwave spectrum observed by use of apparatus of the general type illustrated in Fig. 1 can provide useful information relevant to the determination of the constitution of a multi-phase flow.

It is of course necessary, in a practical situation, to be able to infer from measured data concerning the flow (including the microwave spectrum)

the proportions of the flow constituents. In the system described herein, this is achieved by means of a Neural Network.

The Neural Network of the existing system has been implemented using the C++ language. The currently preferred one hidden layer Network is illustrated in Fig. 13 and is specified in terms of input, number of nodes in the hidden layers and outputs. The weighting coefficients W_{mn} and K_{np} for each node are calculated.

In known manner, the Neural Network is trained by reference to a body of experimental data. The various parameters input to the Network during training are seen in Fig. 14. Fluid pressure may additionally be calculated and input to the Network, since the volume of gas - and hence the microwave properties - are pressure dependent.

The trained Network is then utilised within a predictive algorithm whose functional elements are illustrated in Fig. 15. Because of the high speed of the computer used to implement the algorithm, it is possible to scan all expected combinations of oil, gas and water within the flow. The combinations are input, as seen toward the left of the drawing, to the Neural Network which provides a corresponding predicted value f for the frequency of the cavity's fundamental mode of oscillation.

The combinations are also input to functional units which calculate, analytically, the corresponding values of the flow density ρ and the absorption of gamma rays, α .

The resulting derived values for f , α and ρ are then output to a

comparator which also receives the measured values of the same parameters.

The comparator selects the best fit of the derived values for f , α and ρ to the observed values of the same parameters, and on this basis makes a determination of the oil, gas and water proportions.

The arrangement illustrated in Fig. 1 has been used in the laboratory for testing purposes. Fig. 16 illustrates schematically an arrangement intended for incorporation in an oil extraction pipeline. The cylindrical pipeline wall is seen at 30, the direction of flow being indicated by arrow 32. The resonant electromagnetic cavity is defined by a conductive liner 34 on the interior of the pipeline wall, the ends of the liner being provided with conductive grids 36 which allow flow of material while still defining the extent of the cavity. A microwave transmitter 38 and a microwave receiver 40 are again provided, and as in the Fig. 1 embodiment the "walls" of the cavity, the emitter and the receiver are electrically insulated from the contents of the cavity.

It is possible to dispense with the grids 36, so that the liner 34 alone defines the resonant cavity, in which case certain modes of oscillation are lost but some remain and may be measured as before.


The embodiments of the invention illustrated in Figs. 1 and 16 utilise a receiver separate from the emitter, thereby measuring EM microwave energy input to the cavity as a function of frequency.

An alternative is to observe the reflected power at the transmitting antenna. This is observed by measuring the antenna's voltage standing wave ratio (VSWR). This has been done experimentally. A summary of the results

taken separately in oil, gas and water are given in Fig. 17. At the lower frequencies the VSWR is sensitive to the presence of water, at medium frequencies it is sensitive to the presence of oil whilst only at high frequencies is the VSWR sensitive to the presence of gas. It is believed that the VSWR may be used as a rough indicator of the mixture composition.

THIS PAGE BLANK (USPTO)


FIG. 1

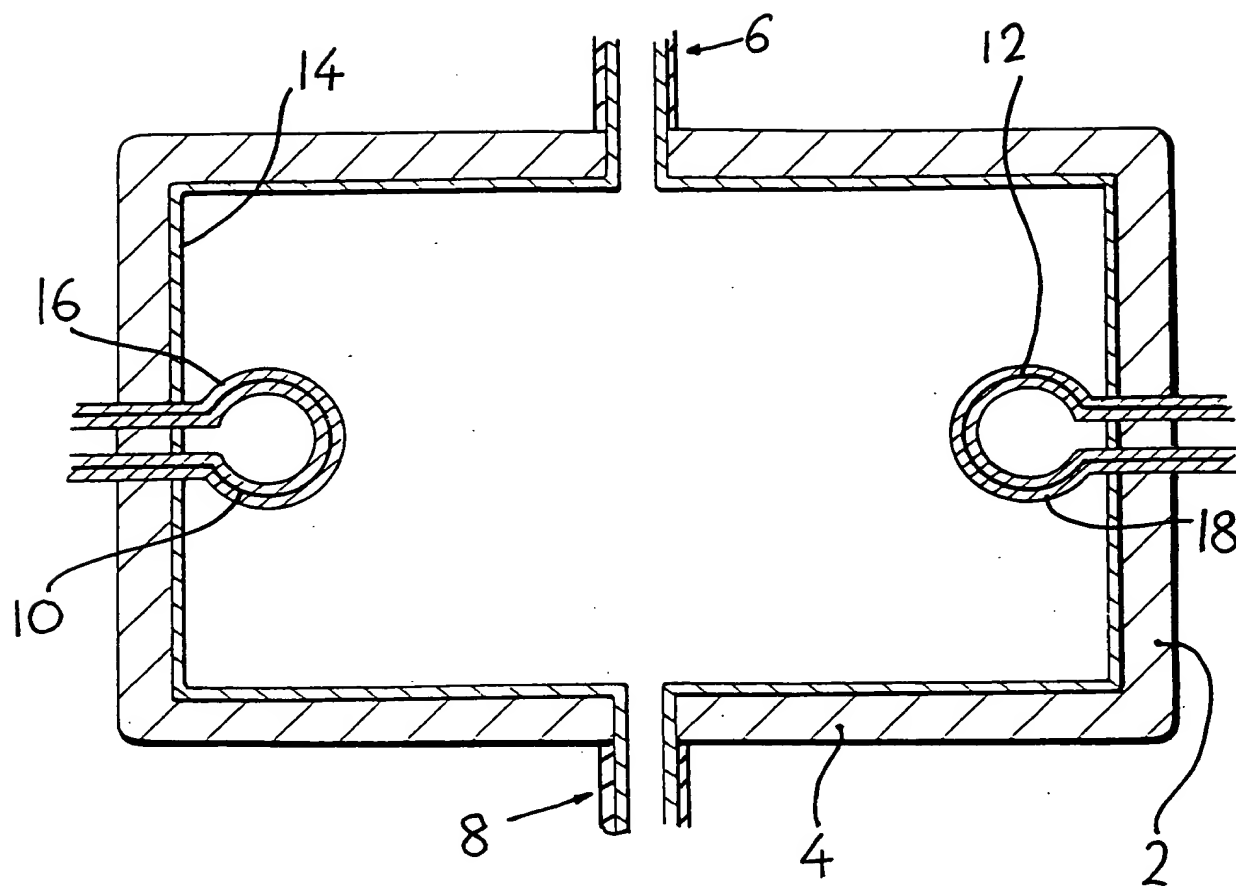

THIS PAGE BLANK (USPTO)


2/11

FIG. 2

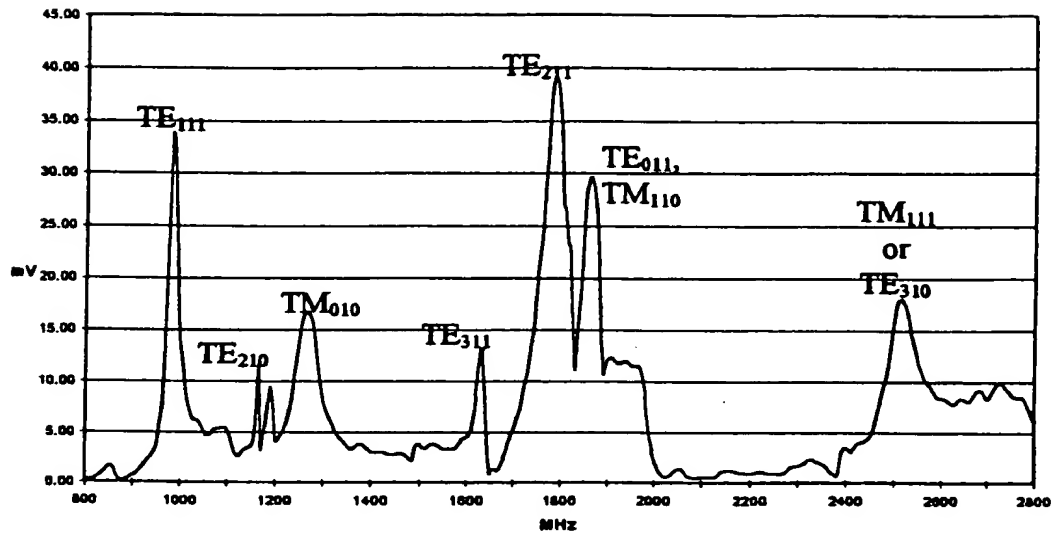

The full spectrum of the resonant frequencies for a cavity filled with gas.

FIG. 3

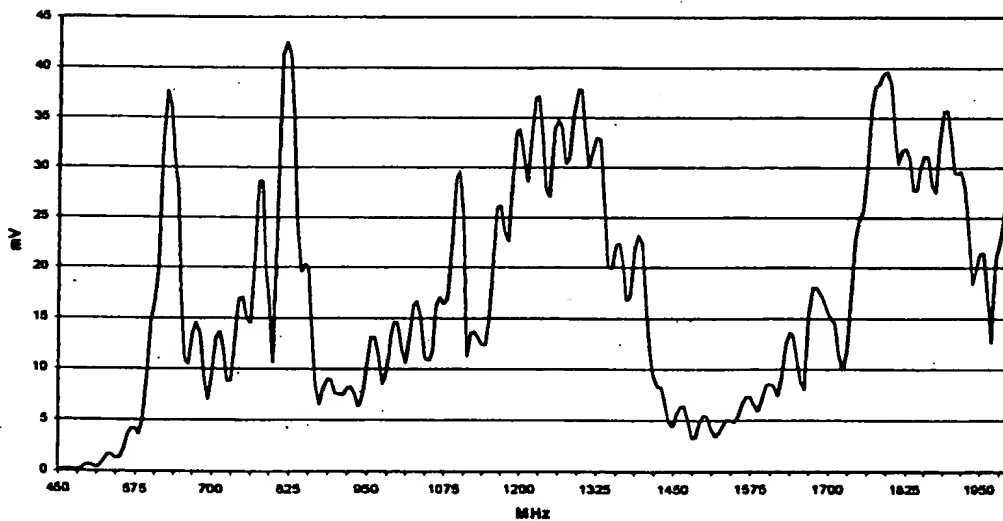


Full spectrum of a cavity filled with oil.

THIS PAGE BLANK (USPTO)


3/11

FIG. 4

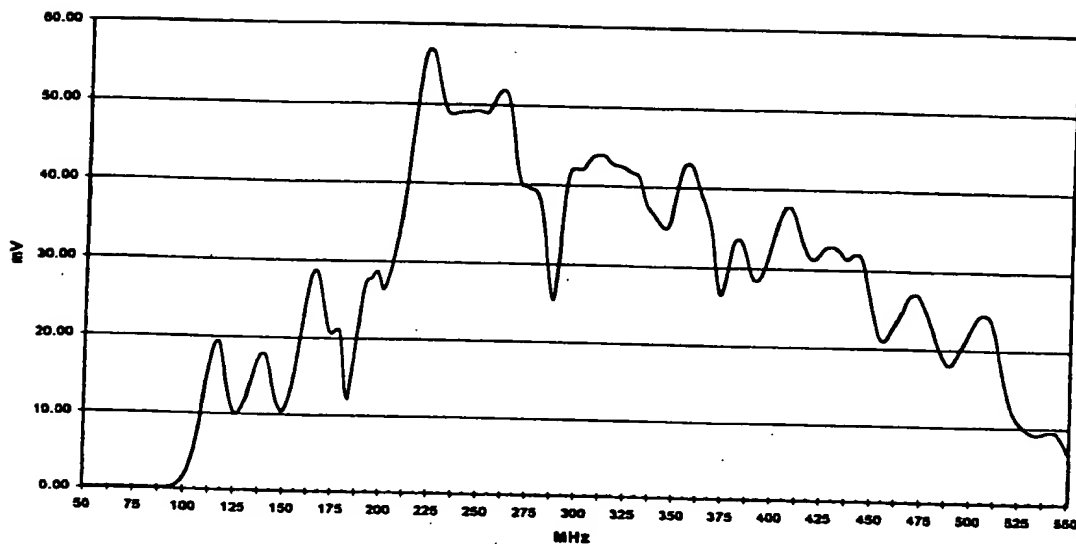

The full spectrum of the cavity when it is filled with water.

FIG. 5

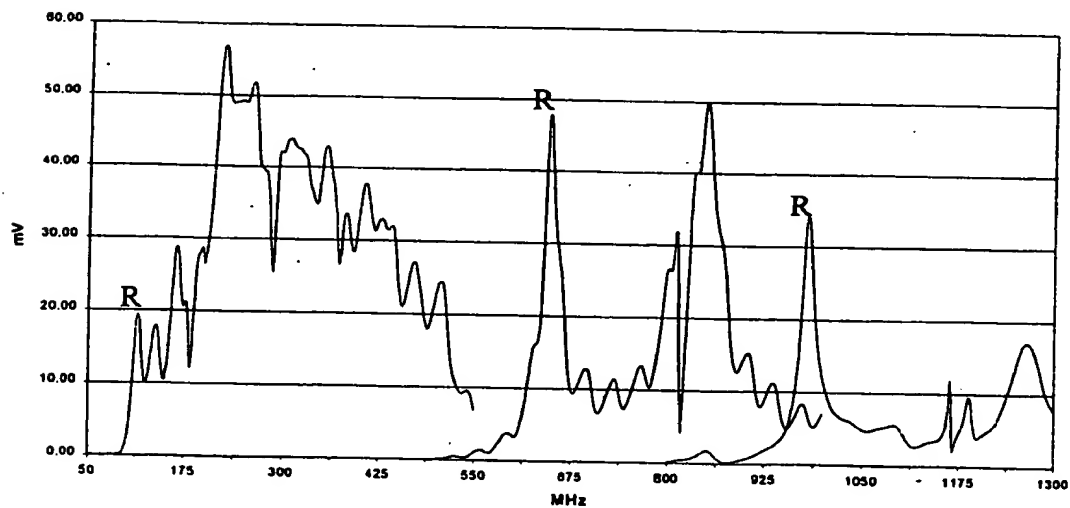

The spectrum of the resonance frequencies for the lower frequency range for air and oil and the full frequency range for water.

THIS PAGE BLANK (USPTO)

4/11

FIG. 6


%Gas	%Oil	%Water	Freq (MHz)
100	0	0	981
90	10	0	977
80	20	0	952
70	30	0	851
60	40	0	802
50	50	0	759
40	60	0	723
30	70	0	707
20	80	0	682
10	90	0	663
0	100	0	649
100	0	0	981
90	0	10	938
80	0	20	610
70	0	30	431
60	0	40	365
50	0	50	305
40	0	60	240
30	0	70	190
20	0	80	170
10	0	90	143
0	0	100	118
0	100	0	640
0	90	10	423
0	80	20	335
0	70	30	277
0	60	40	236
0	50	50	205
0	40	60	159
0	30	70	148
0	20	80	131
0	10	90	126
0	0	100	118
0	50	50	205
10	45	45	231
20	40	40	257
30	35	35	320
40	30	30	372
50	25	25	440
60	20	20	530
70	15	15	600
80	10	10	755
90	5	5	915
100	0	0	981

The table of preliminary resonance frequency measurements

THIS PAGE BLANK (USPTO)


5/11

1G.7

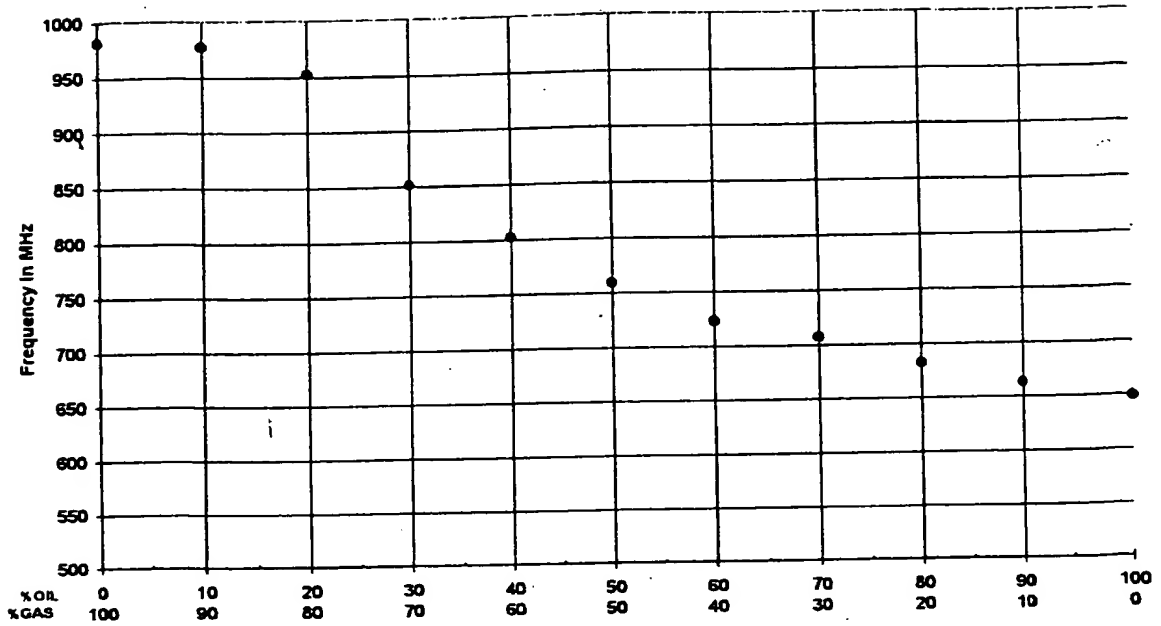

The frequency variation for mixtures of oil and gas

FIG.8

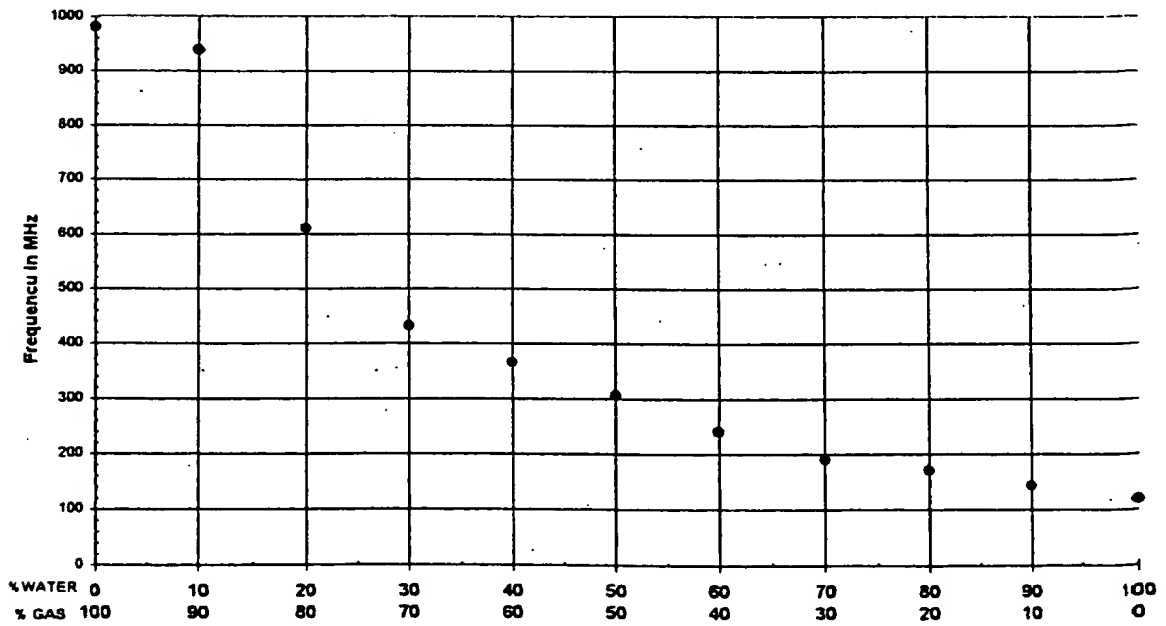


The frequency variations for mixtures of water and gas

THIS PAGE BLANK (USPTO)


6/11

FIG. 9

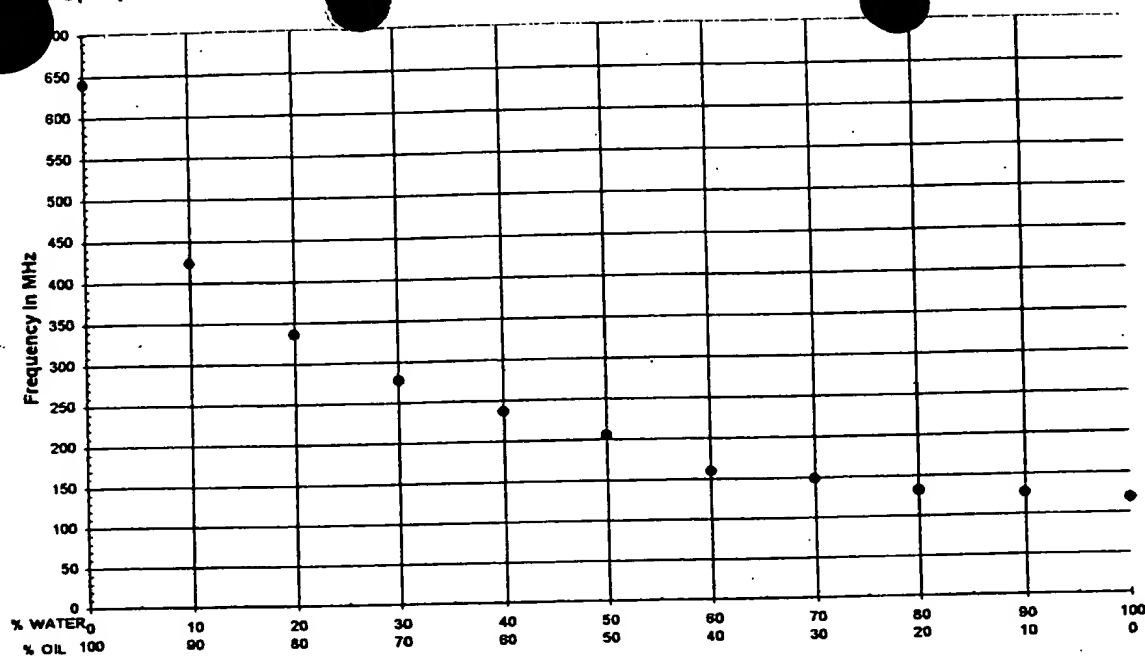

The frequency variations for mixtures of water and oil

FIG. 10

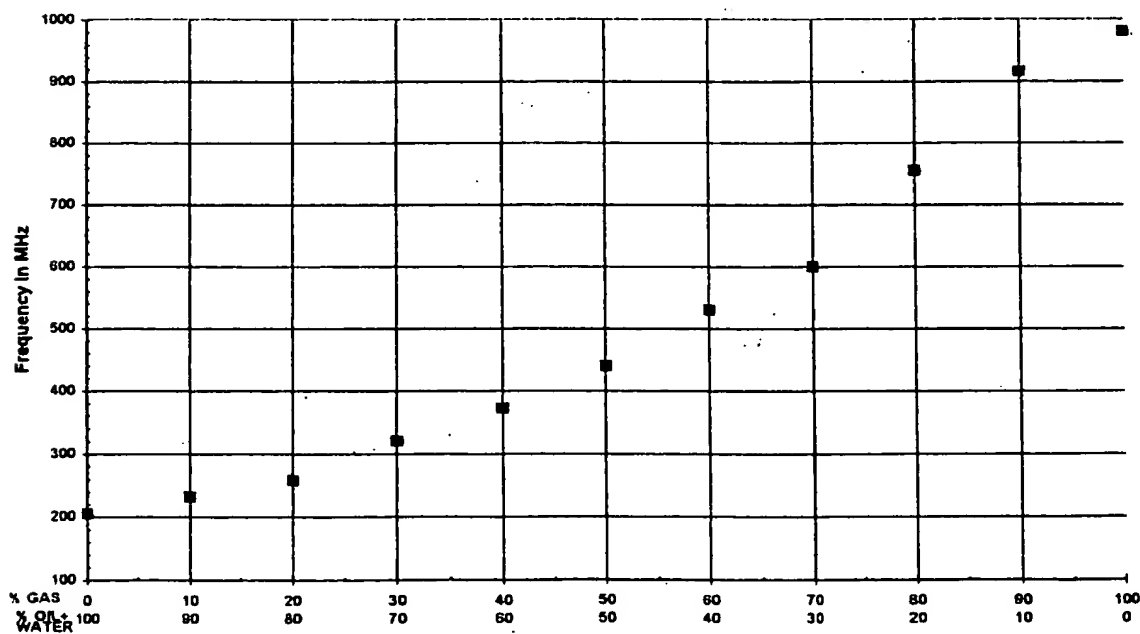


The frequency variations for mixtures of gas and 50:50 water and oil

THIS PAGE BLANK (USPTO)


FIG.11

7/11

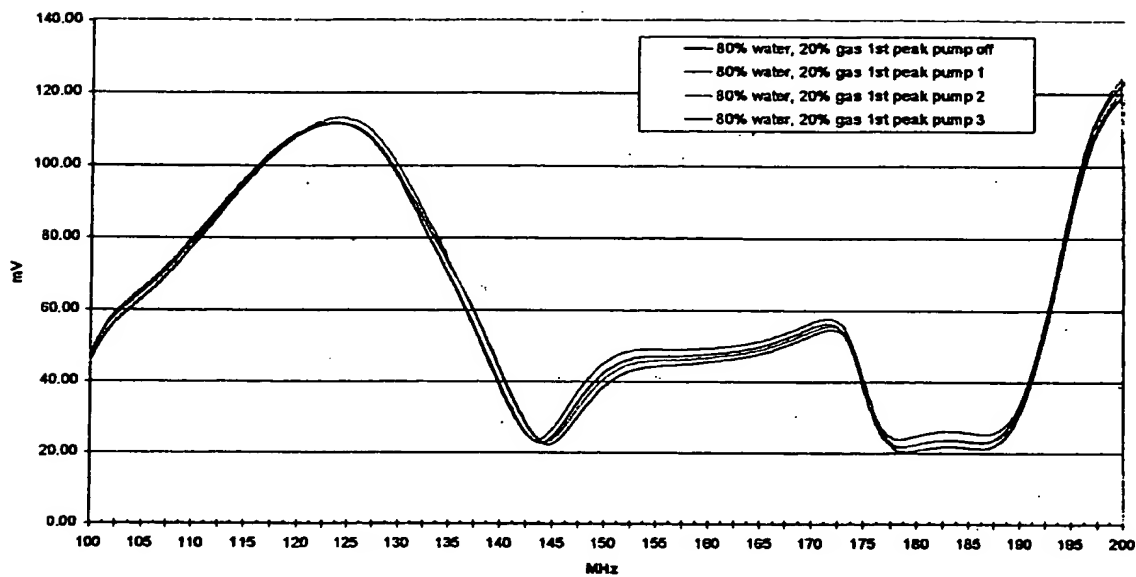

Variation of resonant frequency with pumping speed

FIG.12

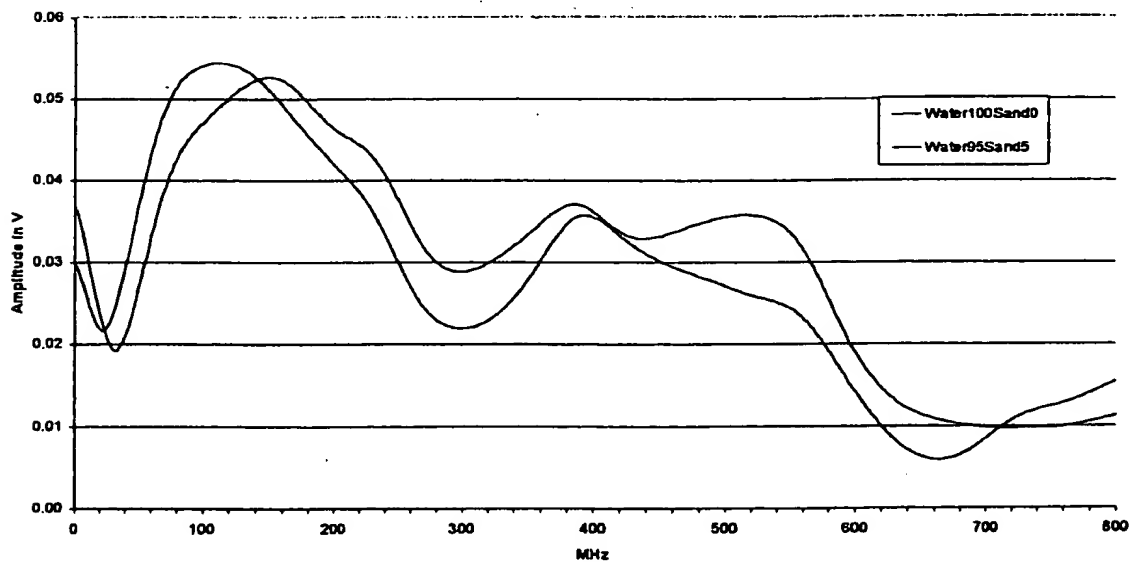


Increased resonant frequency when sand is present

THIS PAGE BLANK (USPTO)


8/11

G.13

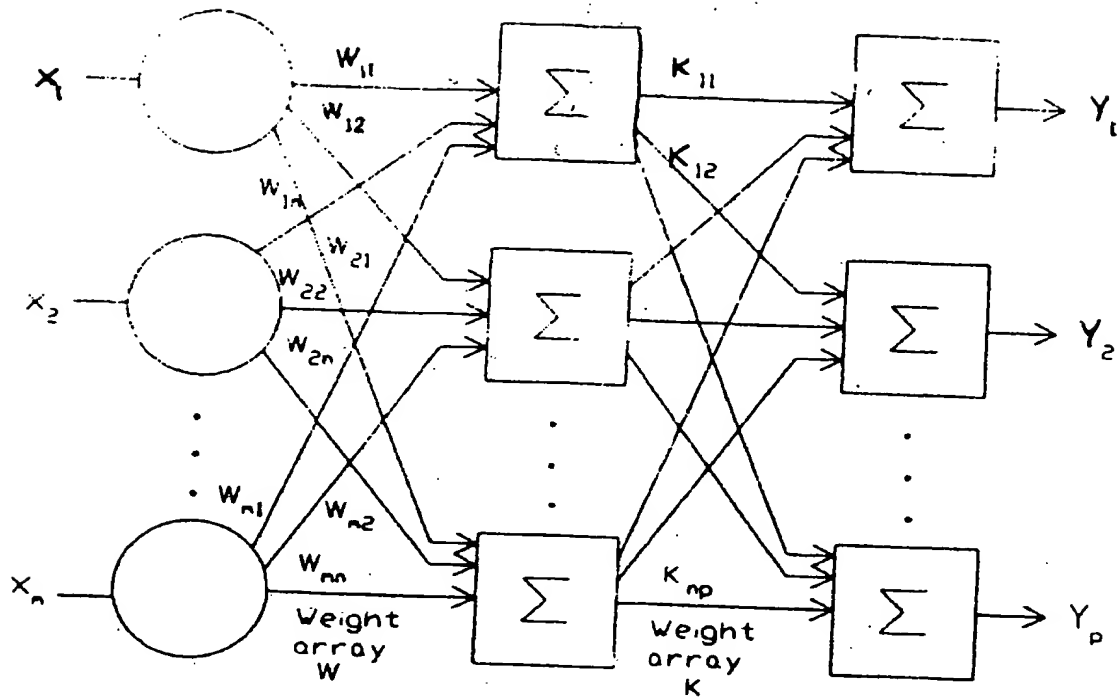

The Two Layer Neural Network

FIG.14

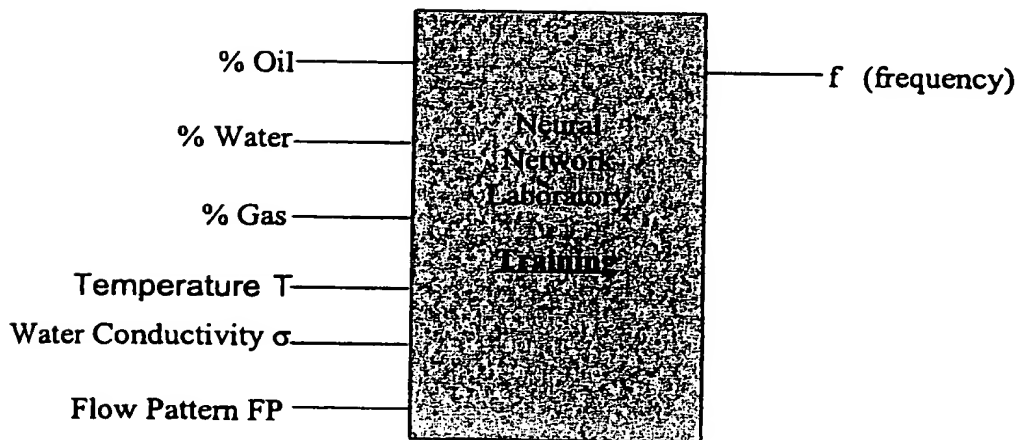

Training Neural from Laboratory Tests of the First Resonant Frequency

THIS PAGE BLANK (USPTO)

9/11


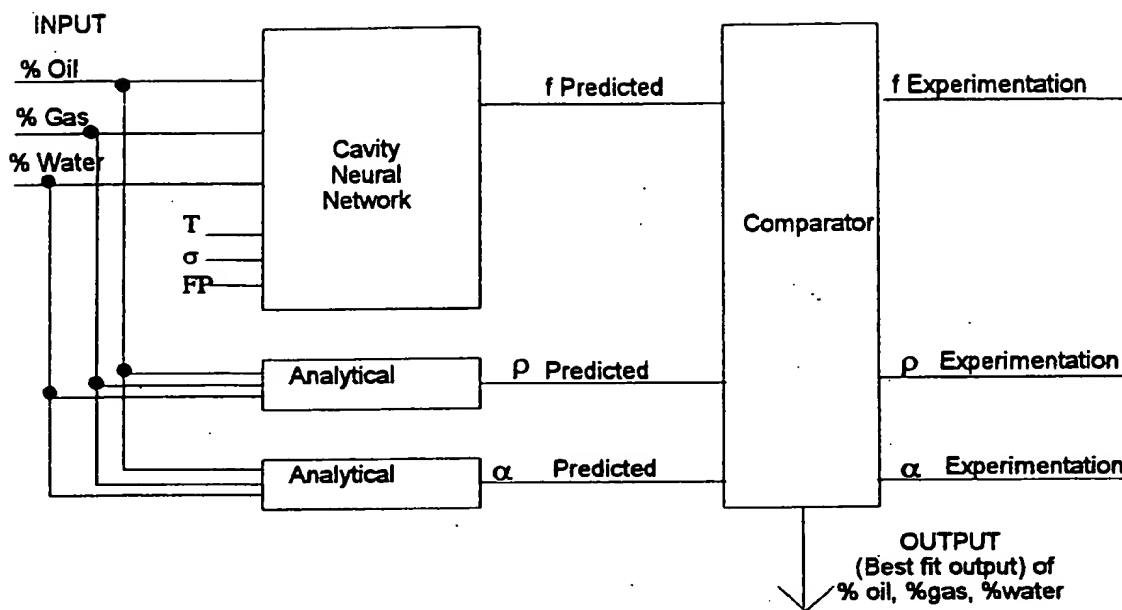


FIG.15

The Instrument Algorithm

THIS PAGE BLANK (USPTO)


FIG. 16

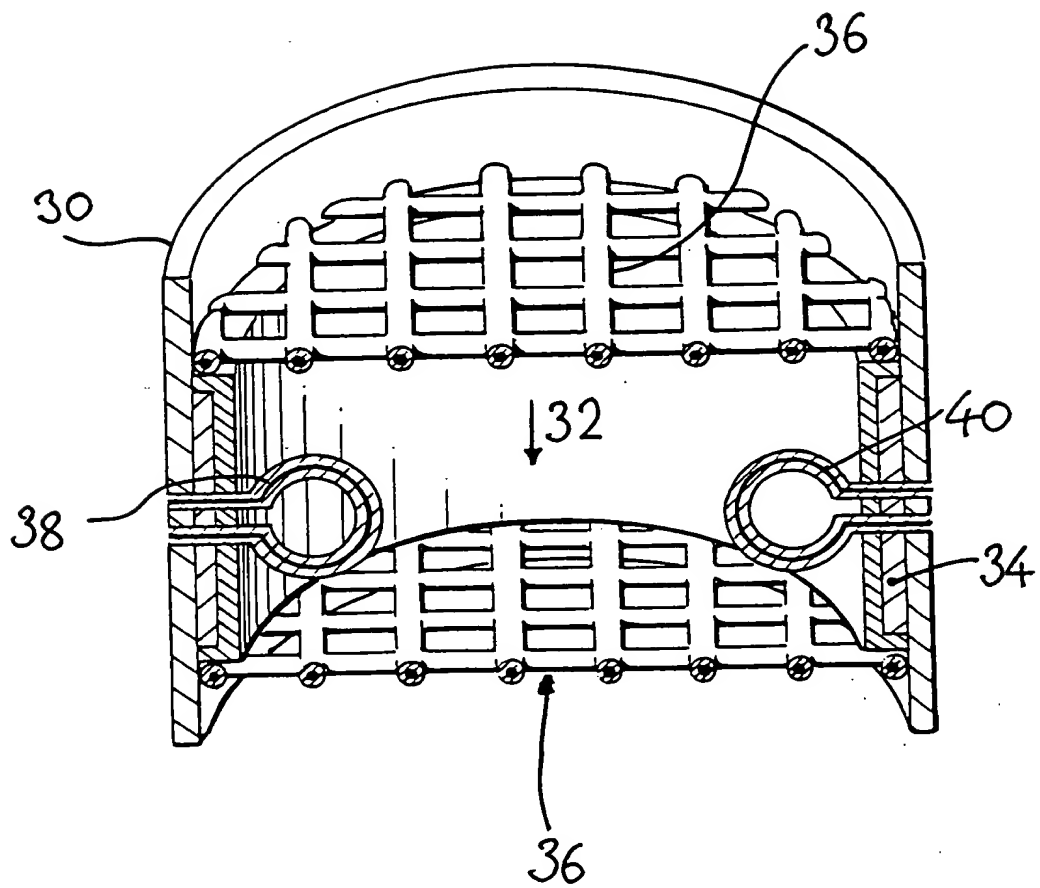

THIS PAGE BLANK (USPTO)

FIG. 17

VSWR for Oil/Gas/Water Cavity

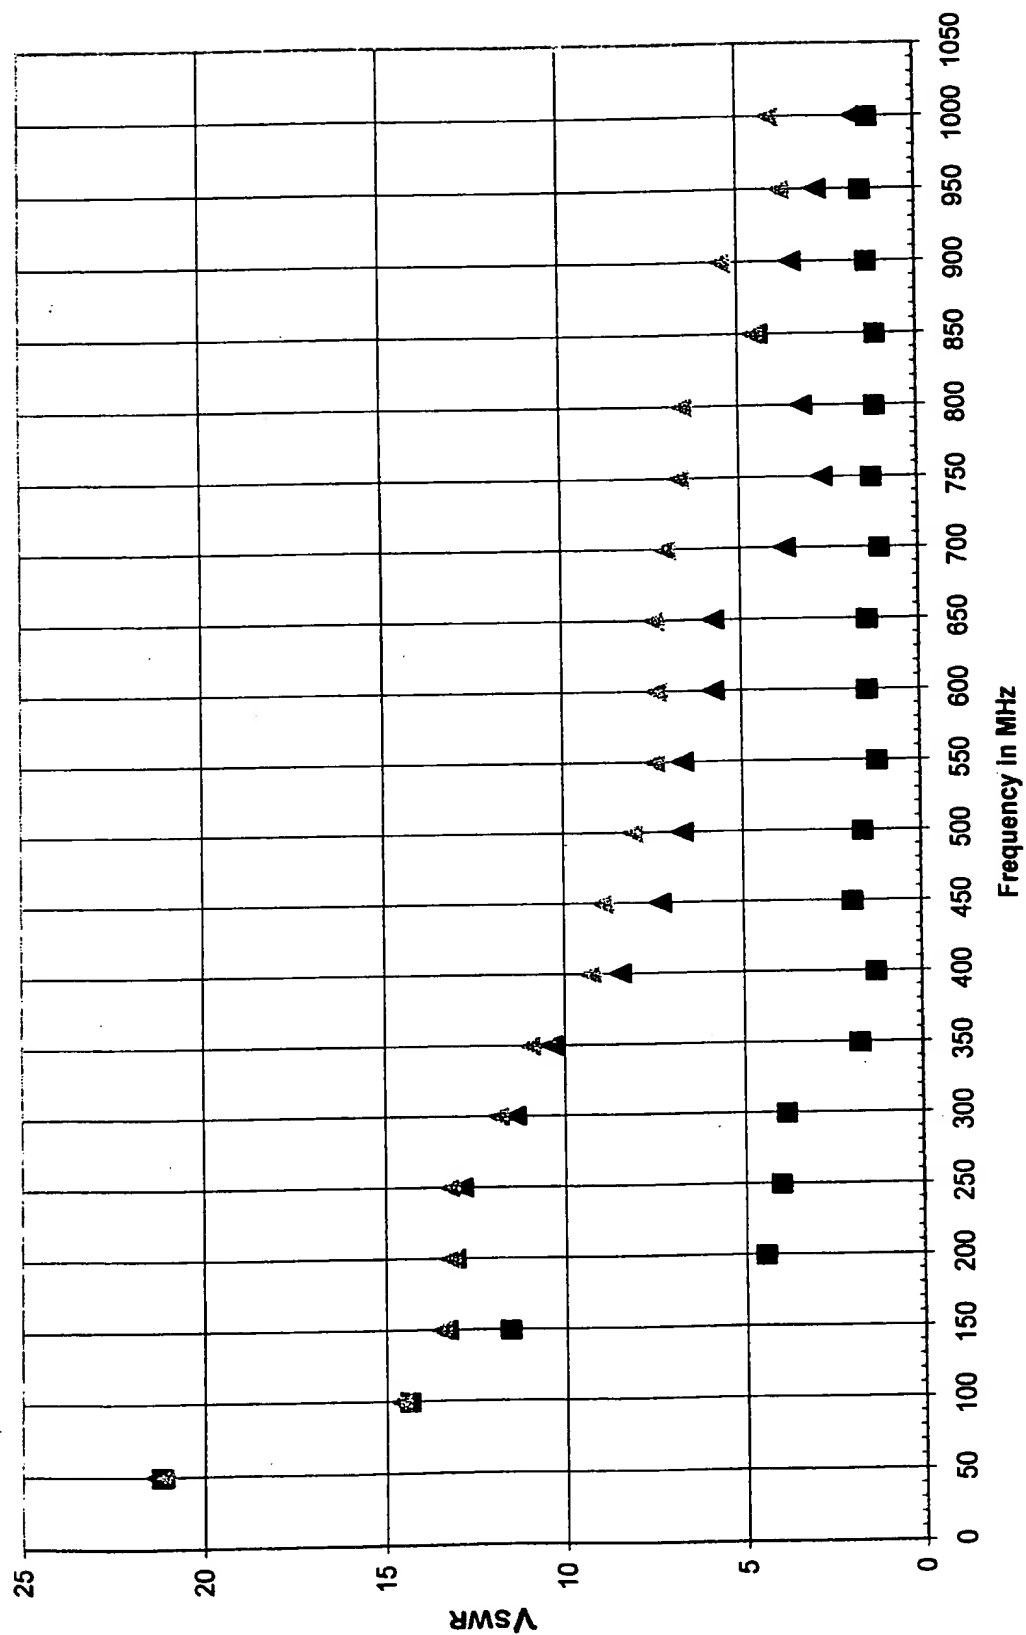

Pt/GB00/00168

24th January '00

W.P. Thompson & Co.

THIS PAGE BLANK (USPTO)